
PLUMBING FIXTURE SPECIFICATION AND CONNECTION SCHEDULE COLD WATER **FIXTURE** FAUCET OR VALVE SYMBOL **FIXTURE REMARKS VENT** MANUFACTURER AND MODEL No. MANUFACTURER AND MODEL No. MANUFACTURER AND MODEL No. BRANCH OUTLET BRANCH OUTLET BRANCH OUTLET SEAT: "OLSONITE" MODEL 10SSC. PROVIDE WITH SELF-MOUNT AT HEIGHT INDICATED ON WATER CLOSET "SLOAN" OPTIMA ROYAL 111 SMO, ADA COMPLIANT, 1.6 'AMERICAN STANDARD" AFWALL EL 1.6, NO. 2257.103, ARCHITECTURAL DRAWINGS. WHERE USED SUSTAINING CONCEALED CHECK HINGES, ONE PIECE WALL MOUNTED 1 1/4" GPF, SENSOR OPERATED CHROME PLATED FLUSHOMETER. 4" WALL HUNG, VITREOUS CHINA, ELONGATED, SIPHON JET STAINLESS STEEL POST HINGES, WHITE COLOR. CARRIER: FOR ADA ACCESSIBLE WATER CLOSETS, FLUSH VALVE UNIT INCLUDES - MANUAL OVERIDE BUTTON. BATTERY ACTION, 1-1/2" TOP SPUD. "J.R. SMITH" 100 OR 200 SERIES VERTICAL ONLY PROVIDE THE FLUSH VALVE HANDLE SHALL BE POWERED. REAR SUPPORT LUG AND ANCHOR FOOT ASSEMBLY. MOUNTED ON THE WIDE SIDE OF THE WC ENCLOSURE. MOUNT AT HEIGHT INDICATED ON SEAT: "OLSONITE" MODEL 10SSC. PROVIDE WITH SELF-**WATER CLOSET** "SLOAN" OPTIMA ROYAL 111 SMO, ADA COMPLIANT, 1.6 "AMERICAN STANDARD" AFWALL EL 1.6, NO. 2257.103, SUSTAINING CONCEALED CHECK HINGES, ONE PIECE ARCHITECTURAL DRAWINGS. WHERE USED WALL MOUNTED 1 1/4" WC-2 4" WALL HUNG, VITREOUS CHINA, ELONGATED, SIPHON JET GPF, SENSOR OPERATED CHROME PLATED FLUSHOMETER. FLUSH VALVE FOR ADA ACCESSIBLE WATER CLOSETS. STAINLESS STEEL POST HINGES, WHITE COLOR. CARRIER: UNIT INCLUDES - MANUAL OVERIDE BUTTON. BATTERY ACTION, 1-1/2" TOP SPUD. "J.R. SMITH" 100 OR 200 SERIES VERTICAL ONLY PROVIDE THE FLUSH VALVE HANDLE SHALL BE REAR SUPPORT LUG AND ANCHOR FOOT ASSEMBLY. MOUNTED ON THE WIDE SIDE OF THE WC ENCLOSURE. "AMERICAN STANDARD" WASHBROOK NO. 6501.010 "SLOAN" OPTIMA ROYAL 186-1.0-SMO, ADA COMPLIANT, MOUNT AT HEIGHT INDICATED ON WALL MOUNTED WALL HUNG, VITREOUS CHINA, WASH OUT FLUSH 1.0 GPF, SENSOR OPERATED CHROME PLATED $1\frac{1}{2}$ " CARRIER: "J.R. SMITH" 637 SERIES ARCHITECTURAL DRAWINGS. FLUSH VALVE ACTION. 1.0 GPF. 3/4" TOP SPUD, 2" THREADED FLUSHOMETER. UNIT INCLUDES - MANUAL OVERIDE BUTTON. BATTERY POWERED. "SYMMONS" ULTRA-SENSE S-6080, SENSOR OPERATED, MOUNT AT HEIGHT INDICATED ON ADA COMPLIANT. 'AMERICAN STANDARD" LUCERNE NO. 0355.012, WALL LAVATORY ARCHITECTURAL DRAWINGS. PROVIDE 4" CENTER. CHROME PLATED, LOW PROFILE, 0.5 GPM LAVATORY GRID DRAIN WITH $1\frac{1}{4}$ " OFFSET TAILPIECE, HUNG, VITREOUS CHINA WITH CONTOURED BACK AND 1 1/2" WALL MOUNTED HOT AND COLD WATER SIDE SPLASH SHIELDS, FRONT OVERFLOW, WITH SOAP INTEGRAL PERFORATED GRID NO. 7723.018, CHROME FINISH. CONCEALED ARMS AND FLOOR SUPPORT, FLOW RESTRICTOR AND VANDAL RESISTANT AERATOR. L-1 WITH FEET OF SUPPORT SECURELY INSTALL WITH IPS CONNECTIONS, FIELD SET TEMPERATURE MOUNT P-TRAP FLUSH TO WALL. DEPRESSION, CONCEALED ARM RECESS, 4" CENTERS, ANCHORED TO FLOOR. IN ADDITION TO RESTRICT OUTLET WATER WATER TEMPERATURE TO A 20" x 18" D SHAPED BOWL. MAXIMUM OF 105° F. BATTERY POWERED. ANCHOR TOP OF SUPPORT TO WALL CONSTRUCTION. "HANSGROHE" AXOR MODEL 35002801, ADA COMPLIANT, SINGLE HOLE, STAINLESS STEEL, LEVER HANDLE LAVATORY LAVATORY ADA COMPLIANT. MOUNT FAUCET TO COUNTER, LOCATE AS "KOHLER" BOLERO MODEL K-2611S, UNDER COUNTER UNDER COUNTER FAUCET WITH 1.0 GPM FLOW RESTRICTOR AND VANDAL HOT AND COLD WATER | MOUNTED, STAINLESS STEEL, SATIN FINISH, LAVATORY GRID DRAIN WITH 1-1/4" OFFSET TAILPIECE, 3/4" 3/4" RECOMMENDED IN INSTALLATION 11/2" L-2 RESISTANT AERATOR. INSTALL WITH IPS CONNECTIONS, SET INTEGRAL PERFORATED GRID NO. 7723.018, CHROME FINISH. INSTRUCTIONS. 15" x 10" COUNTERTOP OPENING. ADA COMPLIANT TEMPERATURE LIMIT STOP TO RESTRICT OUTLET WATER MOUNT P-TRAP FLUSH TO WALL. WATER TEMPERATURE TO A MAXIMUM OF 110° F. "ELKAY" MODEL LRADQ2219-65-BP, 19" FRONT TO "ELKAY" MODEL LKAD35, OFFSET CRUMB CUP STRAINER BACK, 22" WIDE x 6-1/2" DEPTH OVERALL. 18 GAUGE \ "T & S" MODEL B-0300-VR GOOSENECK FAUCET, WITH REMOVABLE BASKET AND P-TRAP. INSTALL P-TRAP FLUSH TO WALL. STAINLESS STEEL, LEDGE BACK WITH SELF- RIM. 2 GPM VANDAL RESISTANT AERATOR AND RIGID/SWING 1 1/2" 3/4" 1/2" COUNTER MOUNTED PROVIDE SINGLE HOLE. PROVIDE REAR DRAIN FAUCET. PROVIDE VANDAL RESISTANT PIN IN FAUCET, HOT AND COLD WATER LOCATION. PROVIDE FACTORY ADHERED VANDAL ARRANGED TO MATE WITH SLOT IN SINK. RESISTANT BACKING PLATE AT FAUCET, AND SLOT AT FAUCET FOR VANDAL RESISTANT PINS. "CHICAGO" 540-LD897SWXF WALL MOUNTED FAUCET, SERVICE SINK "WILLIAMS" SB 900, 24" x 24" x 12" DEEP, AS PART OF ROUGH-IN FOR FAUCET. VACUUM BREAKER SPOUT WITH PAIL HOOK AND ADJUSTABLE SQUARE 3/4" 3/4" 3/4" FLOOR-MOUNTED, TERRAZZO, WITH STAINLESS STEEL PROVIDE SUITABLE BLOCKING FOR TOP TOP BRACE, T-35 HOSE AND WALL BRACKET AND T-40 PROVIDE CAST IRON VENTED P-TRAP. HOT AND COLD WATER CAP ON ALL TOP SURFACES. STAINLESS STEEL MOP HANGER, WITH 3 SPRING LOADED PROVIDE WATER HAMMER ARRESTORS. FLOOR MOUNTED RUBBER GRIPS. PROVIDE STAINLESS STEEL BACK PANELS. "ACORN" MODEL 8121 - INTERIOR WALL MOUNTED. "ACORN" MODEL 8102 - EXTERIOR WALL MOUNTED. MOUNT TRAP PRIMER IN SHEET METAL BOX WITH "MiFAB" MODEL M-500 SERIES TRAP PRIMER PROVIDE BALL VALVE AT EACH TP LOCATION. SEE 1/P-3 FOR PIPING "KARP" OR EQUAL ACCESS DOOR. PROVIDE FLASHING RING AND CLAMP AT FLOORS WITH WATER RESISTANT TYPE "B" STRAINER FOR EXPOSED CONCRETE MEMBRANE. SET TOP OF DRAIN SLIGHTLY TYPE "S" STRAINER FOR TILE FLOOR FD-1 _ "ZURN" MODEL Z-415 FLOOR DRAIN BELOW FLOOR TO INSURE DRAINAGE. TYPE "SL STRAINER FOR COMPOSITION FLOOR INSTALL VENTED P-TRAP WHERE TRAP PRIMERS ARE INDICATED PROVIDE PROPER CONNECTION TO P-TRAP. "HAWS" 7360BTWC, BARRIER-FREE, WALL MOUNTED EYE/FACE WASH WITH TAILPIECE AND 1 ¹/₄" 1 1/4" 2" **EMERGENCY** _ TRAP. WITH MESH STRAINER, DUST COVER, PER EW-1 EYE WASH INTEGRAL INSTALL WITH VENTED P-TRAP PROVIDE WITH OPTIONAL MIXING VALVE (TEMPERED ANSI Z358.1-2009. 16 GAUGE SS WALL FOR TEMPERED WATER. TO 85°F) BRACKET WITH 11" BOWL, FLAG LEVER ACTIVATED **WATER HAMMER** SEE FLOOR PLANS FOR SIZES WHA "ZURN" MODEL 1250 SURPORT SYSTEM: MODEL 6700 MOUNTING INTEGRAL "HAWS" HWUACP8LSS, STAINLESS STEEL, WALL PLATE AND 6800 SUPPORT CARRIER. WITH P-TRAP **ELECTRIC** MOUNTED. STAINLESS STEEL BACK PANEL. PROVIDE MANUFACTURER'S INTERNAL WATER COOLER SUPPORT SYSTEM. WHERE INSTALLED ON **EWC** WALL MOUNTED ADA/STANDARD 11/2" 3/4" CONCRETE OR CMU WALL, PROVIDE TWO _ _ MODEL 6700 MOUNTING PLATES AND INSTALL WITH ONE PLATE ON EACH SIDE OF WALL. SET AT HEIGHT INDICATED ON ARCHITECTURAL DRAWINGS. "WATER-"TITE" MODEL MIB-1 OR "GUY GRAY" REFRIGERATOR PROVIDE 20 GAUGE BOX AND 18 GAUGE ICE MAKER HOOK-UP, WITH 1/2" FIP INLET AND 1/4" INTEGRAL INTEGRAL STAINLESS STEEL FACE PLATE. COMPRESSION OUTLET "ACORN" SERIES 532-ADA, SHOWER INCLUDES ADA COMPLIANT CONTROL VALVE WITH LEVER HANDLE, LEVER HANDLE DIVERTER VALVE, SOAP DISH, TWO CARRIER: "ACORN" WALL MOUNTING HARDWARE FOR SH-1 MOUNT AT HEIGHT INDICATED ON 3/4" 1/2" 3/4" 1/2" "ACORN" SAFTI-TROL HOT AND COLD PRESSURE HEADS, ADJUSTABLE SPRAY PATTERN, EACH WITH 2.5 SURFACE MOUNTED STUD WALL MOUNTING. ARCHITECTURAL DRAWINGS. BALANCING VALVE FOR 2.5 GPM. GPM SPRAY; ADA HEAD ON 5 FOOT STAINLESS STEEL PROVIDE WATER HAMMER ARRESTOR, SIZE PER PDI. HOSE (HAND SHOWER), CONVENTIONAL HEAD AT 6'-6" ABOVE FLOOR. SOAP DISH MUST BE 38" TO 48" ABOVE FLOOR.

OONIGED LIGHTON DOOLINGENED

CONSULTANTS, INC. RANCHO CORDOVA, CALIFORNIA


QC



Consultants in Architecture, Engineering, Planning, and the Environment Sacramento Office 180 Promenade Circle, Suite 300

Sacramento, California 95834 (916) 929-3323 Fax (916) 929-1772

Subconsultant List	
DREYFUSS & BLACKFORD	3540 FOLSOM BOULEVARD, SACRAMENTO, CA 95816 (916) 453-1234
CAPITAL ENGINEERING CONSULTANTS	11020 SUN CENTER DRIVE, RANCHO CORDOVA, CA 95670 (916) 851-3500
ECOM ENGINEERING INC.	1796 TRIBUTE ROAD, SUITE 100 SACRAMENTO, CA (916) 641-5600
BUEHLER & BUEHLER ASSOCIATES	600 Q STREET, STE. 200, SACRAMENTO, CA. 95814 (916) 443-0303
W.L. BURLE ENGINEERS, PA	111 S. WALNUT STREET, GREENVILLE, MS 38702 (662) 332-2619
AQUA ENGINEERING, INC.	4803 INNOVATION DRIVE, FORT COLLINS, CO 80525 (970) 229-9668
THE SIERRA WEST GROUP, LLC	2730 GATEWAY OAKS DRIVE, STE. 110 SACRAMENTO, CA. 95833 (916) 925-4000

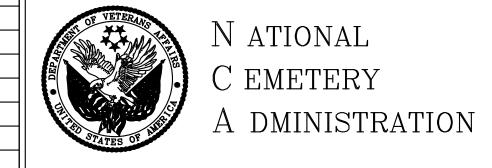

	CON	ISTRUC	CTION DC	CUMENTS
Drawing Title PLUMBING FIXTURE	Project Title LOUISIANA NATIONAL CEMETERY			Date: MARCH 22, 2012
SCHEDULE	11	GRAVESITE EXPANSION PHASE 1B		
Approved: Director, Office of Construction Management	Building Number	Checked	Drawn	DRAWING NO.
Approved: Director, Project Management Service	Location LOUISIANA NATIONAL CEMETERY ZACHARY, LOUISIANA			P-2 Dwg. 123 Of 137